


Sizzer Type Rotators


Each section equipped with two roller support arms to be positioned in one of four positions for handling the following vessel:

6" to 16" diameter
16" to 30" diameter
30" to 48" diameter
48" to 78" diameter

Drive section equipped with 10 to 1 ratio drive giving variable speed of 6" to 60" per minute.

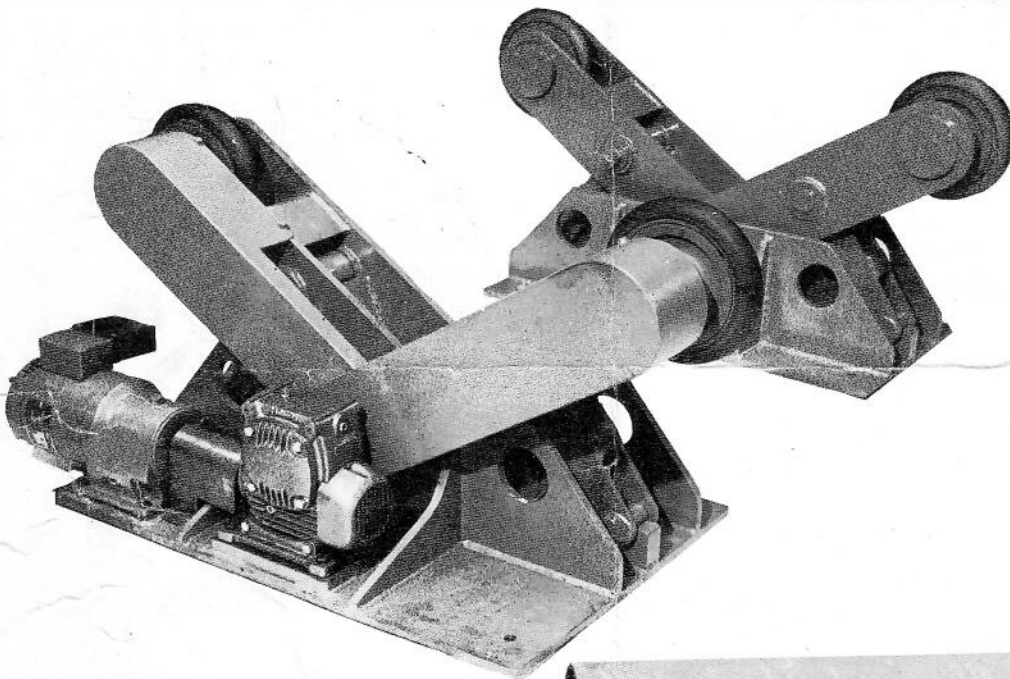

1/CR 40 'SIZZER' ROTATORS
2 tons capacity
Rollers in lowest position.

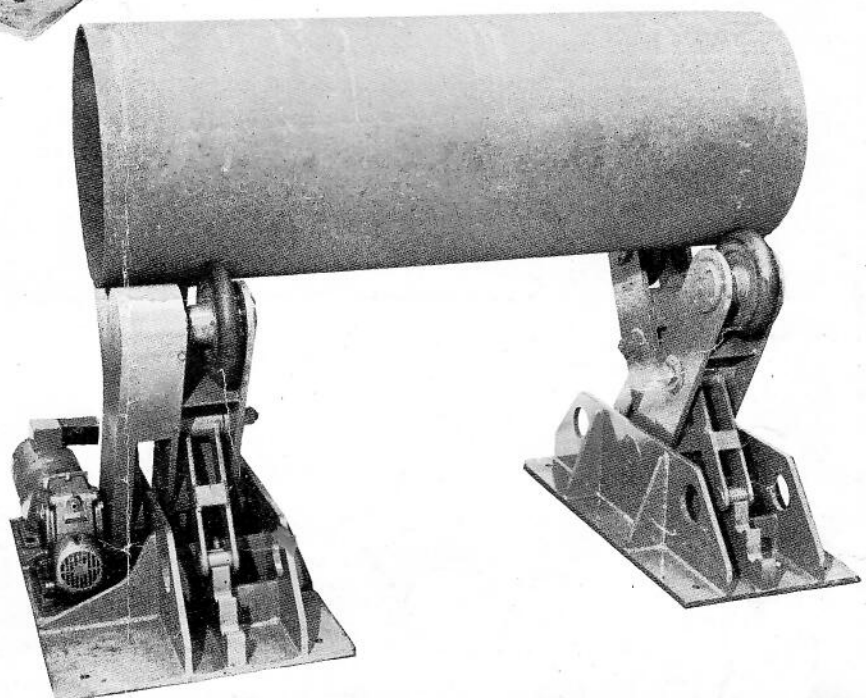

1/CR 40 'SIZZER' ROTATORS
2 tons capacity.