




10 Tonne Elevating Headstock & Tailstock

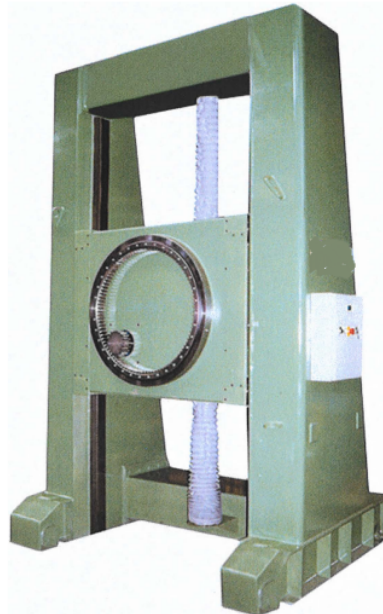

Specification

| | |
|---------------------------------------|--|
| Model | 10T Elevating Headstock & Tailstock |
| Capacity | 22,000lb (10 Tonne) |
| C. O. G. / Eccentricity | 12" (300mm) / 12" (300mm) |
| Table | Optional Extra |
| Centre Line Height Adjustment Minimum | 31.5" (800mm) |
| Centre Line Height Adjustment Maximum | 98.4" (2500mm) |
| Elevated Travel | 66.9" (1700mm) |
| Power Supply | 380/440V 50Hz 32Amp |
| Dimensions LxWxH | Headstock L6' x W7.1' x H11.5' (L1820 x W2185 x H3500mm) Tailstock L6.3' x W7.1' x H11.5' (L1930 x W2185 x H3500mm) |
| Tailstock mounted on manual bogie | |

Specifications are subject to change without notice.