


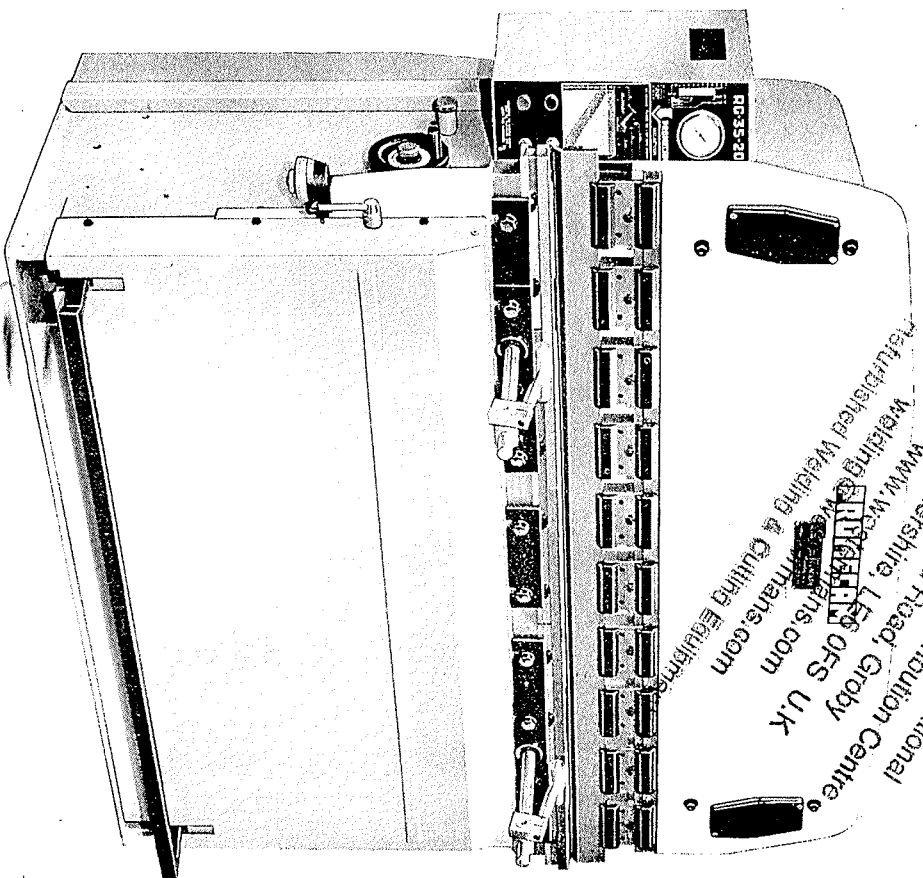


Westernmans International
Unit 4 Midland Distribution Centre
Marfield Road, Groby
Leicestershire, LE6 0FS U.K
www.westernmans.com
Tel: 01530 810000
Fax: 01530 810001
Email: sales@westernmans.com
Westernmans International
Manufactured in the UK

Models RG 35-20 and RG 35-25

Maximum Pressure	35 tons	35 tons
Maximum Length of Bend	6'10"	8'2½"
Clearance between Uprights	5'6½"	7'2¼"
Throat Depth	7½"	7½"
Open height without intermediates	11½"	11½"
Open height with intermediates	8"	8"
Stroke length (infinitely variable)	4"	4"
Approach speed	1½" per sec.	1½" per sec.
Bending speed	½" per sec.	½" per sec.
Return speed	2" per sec.	2" per sec.
Nominal bending capacity 6.1 die ratio	6'10"x18G V = 1½"	8'0"x20G V = 1½"
Nominal bending capacity 8.1 die ratio	6'10"x14G V = 1½"	8'0"x18G V = 1½"
Nominal bending capacity 10.1 die ratio	6'6"x12G V = 1"	7'0"x12G V = 1"
No. of Jacks	1	1
Motor Power	5.5 H.P.	5.5 H.P.
Hydraulic Oil Volume	9 gallons	9 gallons
Approximate nett weight	2.2 tons	2.7 tons

Model RG 35-20 and RG 35-25

Westernmans International
 Unit 4 Midland Distribution Centre
 Markfield Road, Groby
 Leicestershire, LE6 0FS UK
www.westernmans.com
welding@westernmans.com
 Refurbished Welding & Cutting Equipment

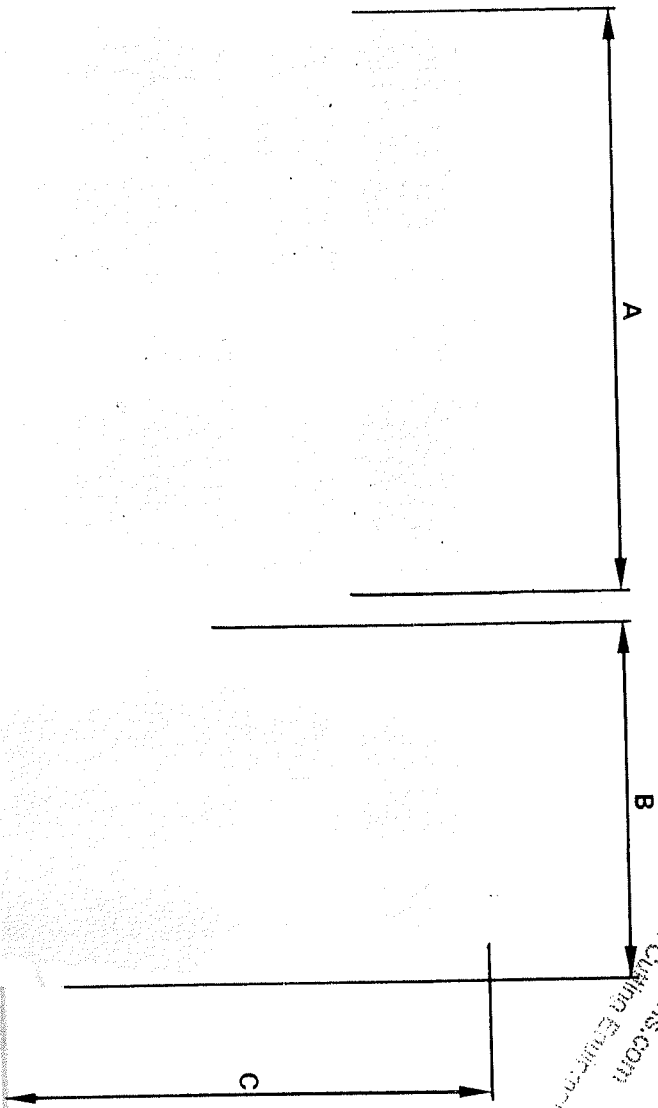

Dimensions		RG 35-20	RG 35-25
A	Overall length	6'9"	8'4"
B	Overall width	3'5"	3'5"
C	Height	6'4"	6'4½"