



HyPerformance[®] Plasma HPR260XD[®]

The HPR260XD delivers superior HyPerformance cutting across a broad range of application needs, from very thin to heavier thicknesses.

Mild steel cut capacity

Dross free*	32 mm
Production pierce	38 mm
Maximum cutting capacity	64 mm

Stainless steel cut capacity

Production pierce	32 mm
Maximum cutting capacity	50 mm

Aluminum cut capacity

Production pierce	25 mm
Maximum cutting capacity	50 mm

* Feature and material type can influence dross free performance.

Superior cut quality and consistency

HyPerformance Plasma cuts fine-feature parts with superior quality and consistency, eliminating the cost of secondary operations.

- HyDefinition[®] technology aligns and focuses the plasma arc for more powerful precision cutting up to 64 mm on mild steel.
- New HDi[™] technology delivers HyDefinition cut quality on thin stainless steel from 3 to 6 mm.
- Patented system technologies deliver more consistent cut quality over a longer period of time than other systems available on the market.

Maximized productivity

HyPerformance Plasma combines fast cutting speeds, rapid process cycling, quick changeovers and high reliability to maximize productivity.

Minimized operating cost

HyPerformance Plasma lowers operating cost and improves profitability.

- LongLife[®] technology significantly increases consumable life and enables consistent HyDefinition cut quality over the longest period of time.


Unmatched reliability

Extensive testing, backed by more than four decades of experience, guarantees the Hypertherm quality you can count on.



Cut quality over life (260 A)

20 mm mild steel

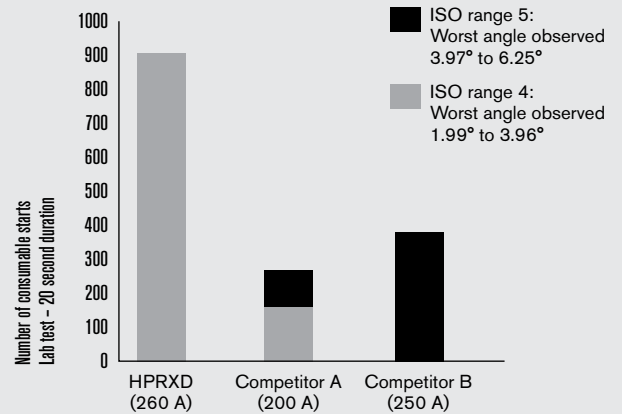

Superior cut quality on mild steel and stainless steel



Specifications

Input voltages (3-PH) and currents	VAC	Hz	Amps
	200/208	50/60	149/144
	220	50/60	136
	240	60	124
	380	50/60	84
	400	50/60	75
	415	50/60	75
	440	60	68
	480	60	62
	600	60	50
Output voltage	175 VDC		
Output current	260 A		
Duty cycle	100% at 40°C at 45,5 kW		
Power factor	0,98 @ 45,5 kW output		
Maximum OCV	311 VDC		
Dimensions	115 cm H, 82 cm W, 119 cm L		
Weight with torch	567 kg		
Gas supply			
Plasma gas	O ₂ , N ₂ , F5*, H35**, Air, Ar		
Shield gas	N ₂ , O ₂ , Air, Ar		
Gas pressure	8,3 bar Manual gas console 8 bar Automatic gas console		

* F5 = 5% H, 95% N₂

** H35 = 35% H, 65% Ar



Cut with confidence

- Hypertherm is ISO 9001: 2000 registered.
- Hypertherm's full-system warranty provides complete coverage for one year on the torch and leads and two years on all other system components.
- Hypertherm's plasma power supplies are engineered to deliver industry leading energy efficiency and productivity with power efficiency ratings of 90% or greater and power factors up to 0,98. Extreme energy efficiency, long consumable life, and lean manufacturing lead to the use of fewer natural resources and a reduced environmental impact.

Operating data

Material	Current (amps)	Thickness (mm)	Approximate cutting speed (mm/min)
Mild steel	30	0,5	5355
		3	1160
		6	665
O ₂ plasma	80†	3	6145
		12	1410
		20	545
Air shield	130†	6	4035
		10	2680
		25	550
O ₂ plasma	200†	10	3460
		20	1575
		32	750
Air shield	260†	12	3850
		20	2170
		32	1135
Stainless steel	60	3	2770
		4	2250
		5	1955
		6	1635
H35 and N ₂ plasma*	130†	6	1835
		12	875
		20	305
N ₂ shield	200	8	2000
		12	1800
		20	1000
H35 plasma	260†	10	2030
		12	1710
		20	1085
N ₂ shield	260†	10	2190
		12	1790
		20	1320
Aluminum	130	6	2215
		12	1455
		20	815
H35 and N ₂ plasma*	200	8	4350
		12	3650
		20	1050
N ₂ shield	260	12	4290
		20	1940
		32	940

HDi

† Consumables support up to 45° bevel capability.

* H35 and N₂ mixed plasma gas requires the use of an autogas console.

The operating data chart does not list all processes available for the HPR260XD.

Please contact Hypertherm for more information.

One of Hypertherm's long-standing core values is a focus on minimizing our impact on the environment. Doing so is critical to our, and our customers', success. We are always striving to become better environmental stewards; it is a process we care deeply about.



Hypertherm, HyPerformance, HPR, HyDefinition, HDi and LongLife are trademarks of Hypertherm Inc. and may be registered in the United States and/or other countries. All other trademarks are the properties of their respective owners.

© 8/2016 Hypertherm Inc. Revision 6
87080D

Hypertherm[®]
SHAPING POSSIBILITY™

