




GULLCO

MOTORIZED WELDING GUN/CUTTING TORCH POSITIONING ASSEMBLY

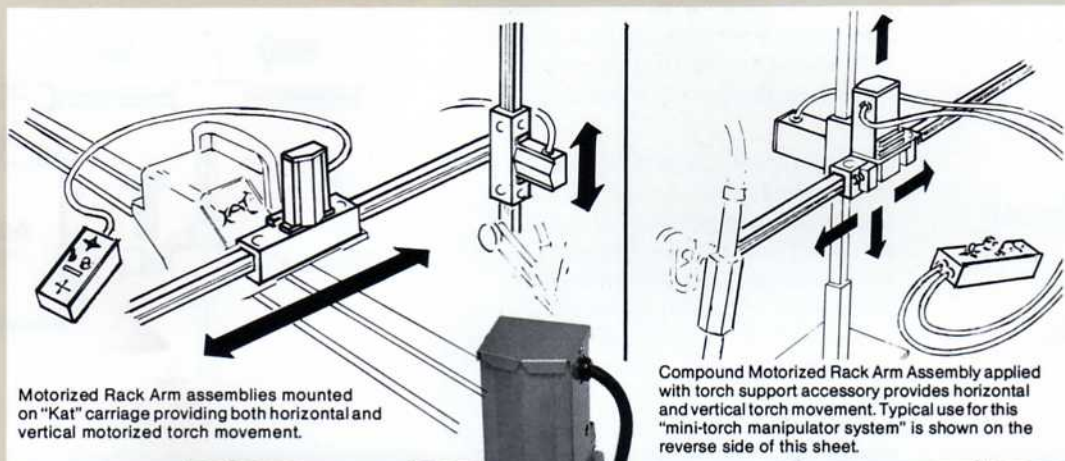

Motorized Rack Arm assemblies mounted on "Kat" carriage providing both horizontal and vertical motorized torch movement.

Compound Motorized Rack Arm Assembly applied with torch support accessory provides horizontal and vertical torch movement. Typical use for this "mini-torch manipulator system" is shown on the reverse side of this sheet.



Improve the precision and efficiency of welding or cutting operations with these Gullco accessories. The motorized rack box moves the arm to the left or right....and up or down when used vertically on command from a "joy stick" equipped control box. A high speed override switch enables the operator to quickly position the torch prior to using low speed movement to follow the weld seam. Two assemblies can be compounded to provide remote adjustment capabilities on both the X and Y axisboth controlled by a single joy stick. The following components are used to provide assemblies suited to various application requirements.

Model GK-190-214 - an 8" (203 mm) long, 1 1/8" (29 mm) motorized rack box with adjustable nylastic bearing plugs, mounting holes suited to the Gullco P-Kat carriage, a 24" (610 mm) long 1 1/8" (29 mm) rack arm* and a 15 ft. (4572 mm) control cable with quick disconnect plug for connection to the pendant control box.

Model GK-190-217 - a 10" (254 mm) long, 1 1/2" (38 mm) extra heavy duty motorized rack box with adjustable nylastic bearing plugs, mounting holes suited to the Gullco P-Kat carriage and a 24" (610 mm) long, 1 1/2" (38 mm) rack arm with one end turned to 1 1/8" (29 mm) diameter. Includes control cable described above.

Model GK-190-201 - remote pendant control box for use with either of the above models. It features a "joy stick" that gives the operator fingertip control of rack arm movement in either direction, vertically or horizontally. The control incorporates direction indicator lights, high speed selector switch, and speed potentiometer providing infinite adjustment of rack arm movement between .5 and 35 IPM (1.27-89 cm/min.).

Compound Assemblies:

Comprised of two motorized rack boxes mounted at right angles to provide up/down, in/out movement of two 24" (610 mm) long rack arms. Supplied with two 15 ft. (4572 mm) control cables.

Model GK-190-216 - as above with 1 1/8" (29 mm) rack boxes and arms.

Model GK-190-219 - 1 1/2" (38 mm) rack boxes and arms.

The capacity of these motorized rack arms is 50 lbs. (20.4 kg) load vertical. **The extra heavy duty 1 1/2" (38 mm) arm provides an additional 33% rigidity over the 1 1/8" (29 mm) arm.** Safety is assured by the use of Gullco's low voltage (24 volt) micro processor based control system for operation on either 42, 110, or 230 volt A.C. single phase 50/60 Hz power supply. Specify voltage when ordering.

Limit switches and longer rack arms and control cables are available on request. Gullco motorized rack arms can be readily adapted to any existing welding fixture for operations requiring infinite precise adjustment of the welding gun position.