


Hypermaxi 20-40

Range 465 - 937 mm (20" - 40")

New pipe bevelling machine with a wide inside locking range from 20" to 36"

Its versatility makes this machine suitable for a wide selection of applications in several fields. Its strength is the ability of removing material in large quantity, achievable both with the HSS and insert type, interchangeable tooling with Supermaxi 7_24.

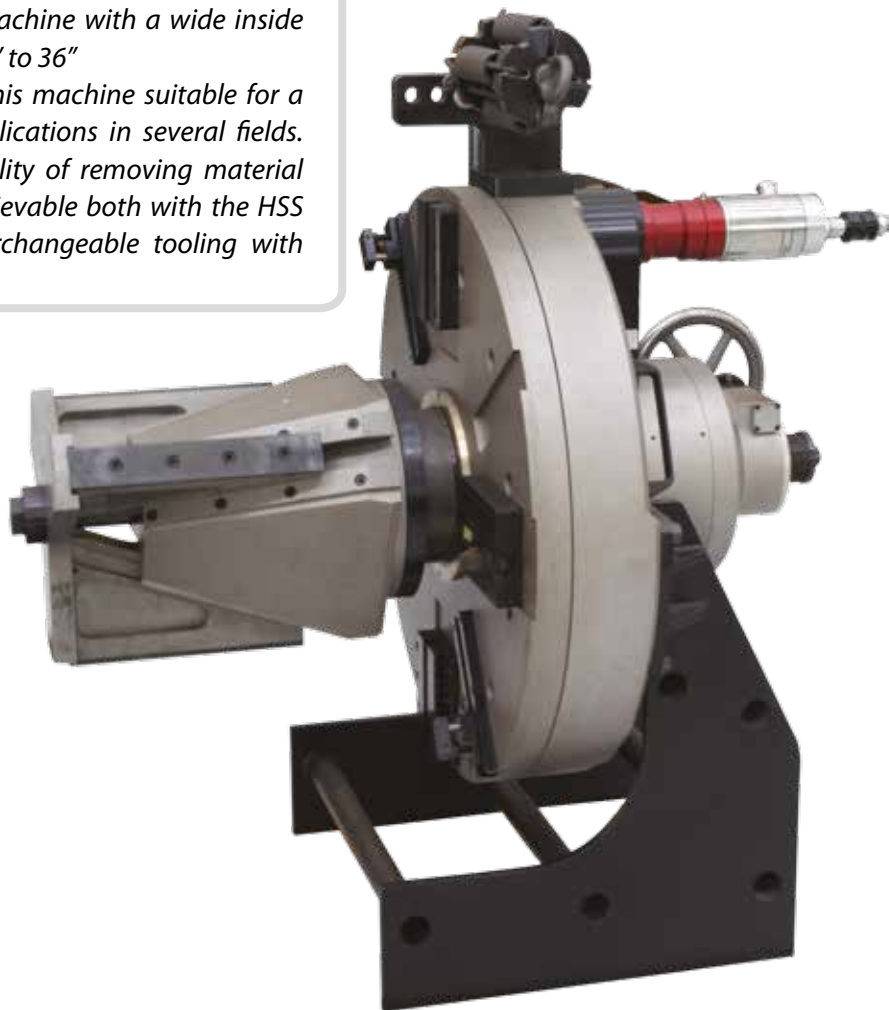

standard


special

Hypermaxi 20-40

Optional:

- Extension kit up to 40";
- Automatic feeding system (available only for the hydraulic version).

- DIMENSIONS

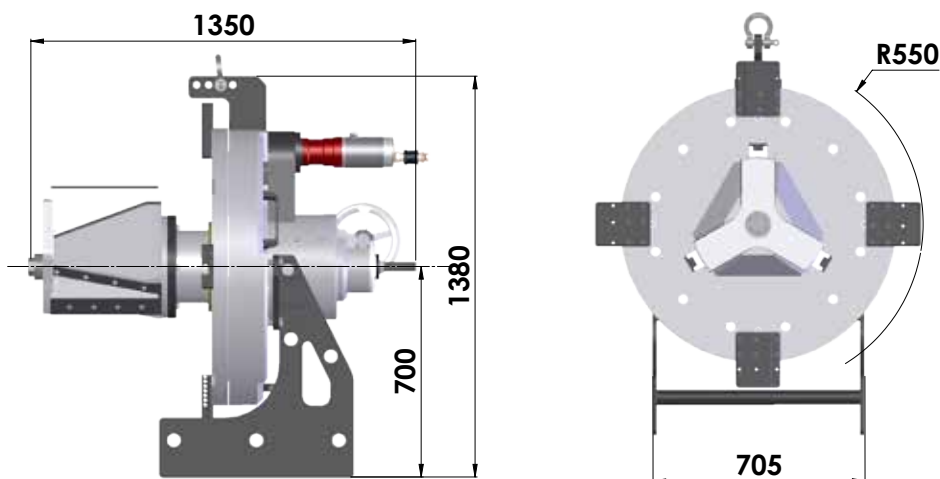

TECHNICAL FEATURES

		PNEUMATIC	HYDRAULIC
ID Locking Range	mm (inches)	465-997 (18.30-39.25)	465-997 (18.30-39.25)
OD Locking Range	mm (inches)	508-1016 (20-40)	508-1016 (20-40)
Idle Speed	Rpm	6	14
Stroke	Mm (inches)	100 (3.93)	100 (3.93)
Pneumatic Motor Power	Hp (W)	4.21 (3100)	-
Max Chuck Torque	Nm	2492 (6bar) 4658 (8bar)	6200
Air Consumption	NI/min (cfm)	2800 (99)	-
Air Pressure	Bar (psi)	6 ÷ 8 (87÷116)	-
Air Hose Connection	Pollici (inches)	3/4" (3/4")	-
Hydraulic Motor Power	Hp (W)	-	12.92 (9500)
GBC Hydraulic Power Pack Pressure	Bar (psi)	-	140 (2030)
Oil Flow	L/min (cfm)	-	64 (14.1)
Max Acoustic Emission	Db	75	75
Machine Weight	Kg	870	870