


# 3HCD 3 Rolls


SYNCHRONIZED HYDRAULIC PLATE BENDING MACHINE




**Flexible**

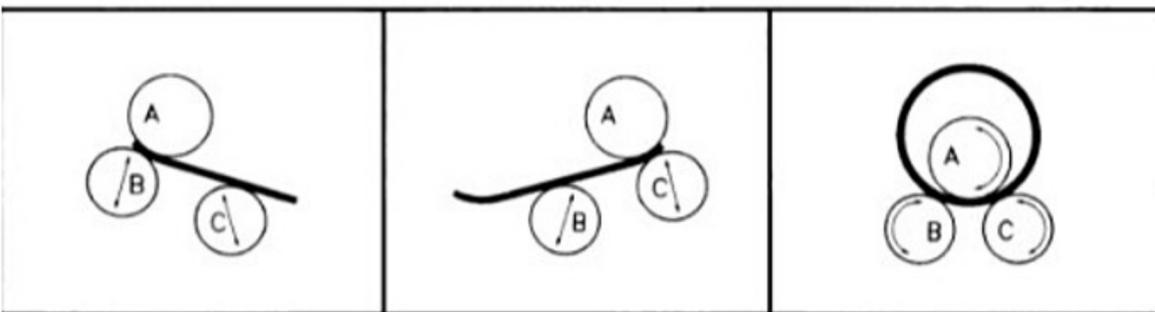

MODEL 3HCD	LENGHT mm.	ROLLING THICK mm.	PREBEND THICK mm.	TOP ROLL Ø mm.	LOWER ROLLS Ø mm.	POWER HP.	WEIGHT Tons
3HCD 1518	1550	13	9	185	165	7,5	2,2
3HCD 1521		15	12	215	195	10	2,7
3HCD 1523		19	15	235	215	12,5	4
3HCD 1526		23	18	265	245	15	4,5
3HCD 1528		28	22	285	265	20	5
3HCD 2018	2050	9	7	185	165	7,5	2,6
3HCD 2021		13	9	215	195	10	3,1
3HCD 2023		15	12	235	215	12,5	4,5
3HCD 2026		19	15	265	245	15	5,2
3HCD 2028		23	18	285	265	20	6
3HCD 2518	2550	7	5	185	165	7,5	3
3HCD 2521		9	7	215	195	10	3,5
3HCD 2523		13	9	235	215	12,5	5
3HCD 2526		15	12	265	245	15	6
3HCD 2528		19	15	285	265	20	6,6
3HCD 2531		21	17	315	295	20	9,5
3HCD 2533	23	19	335	315	25	10,5	
3HCD 3021	3050	7	5	215	195	7,5	4
3HCD 3023		9	7	235	215	10	5,7
3HCD 3026		13	9	265	245	12,5	6,5
3HCD 3028		15	12	285	265	20	7,5
3HCD 3031		17	14	315	295	20	10,5
3HCD 3033		20	15	335	315	25	11,5

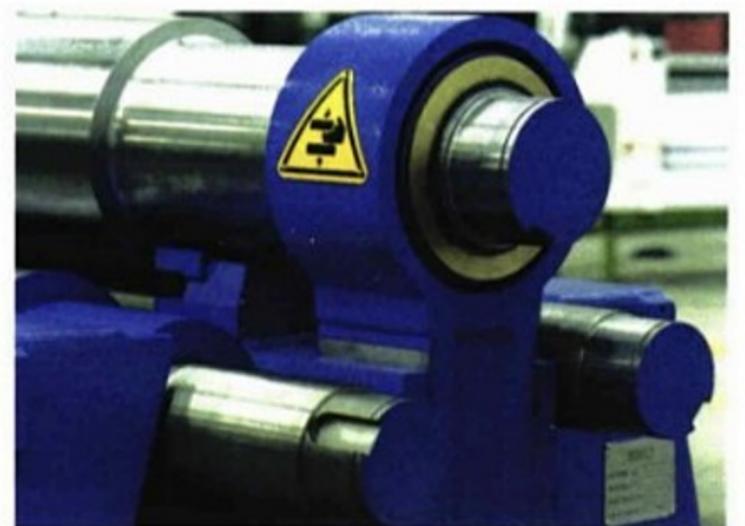

EXTENDED SHAFTS FOR SECTION BENDING DIES

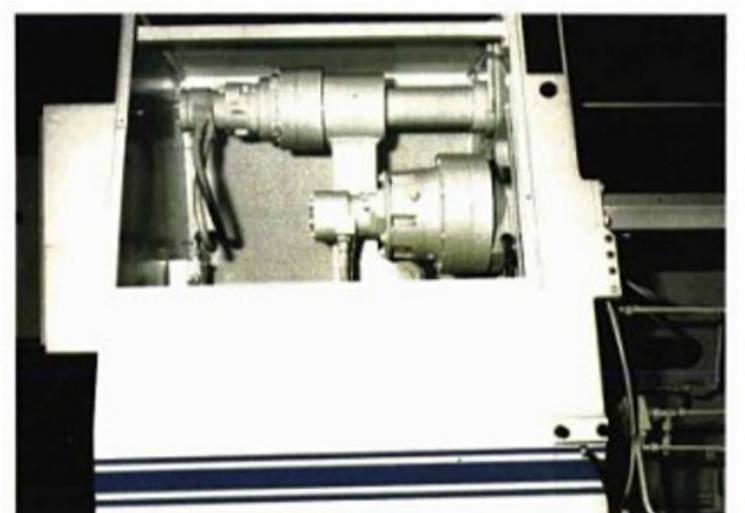

INDEPENDENT HYDRAULIC MOTORS FOR EACH ROLL