




PLATE BEVELLING MACHINE - HEAVY DUTY KBM-28®

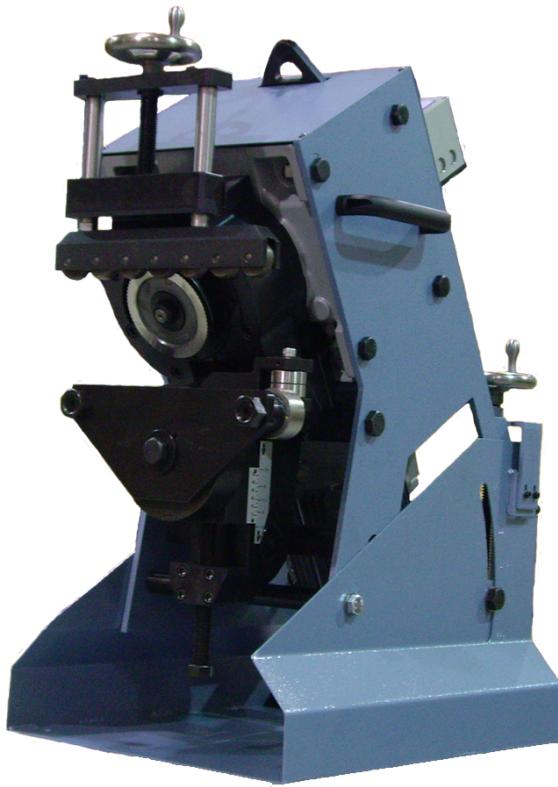

KBM-28-100

KBM-28® Plate Edge Beveller -
Heavy Duty - Portable - Self-Propelled - No Noise

KBM-28® Bevellers produce clean machined bevels with no thermal distortion on mild steel, stainless steel and aluminum plate from 5/16" (8.0 mm) to 2"(50.0 mm) thick. The KBM-28® automatically bevels the topside of the plate reducing time and cost. Savings are further enhanced when the KBM-28U® underside beveler is used in applications where both sides of the plate require bevelling.

This portable plate beveller has an adjustable undercarriage for easy height adjustment. The KBM-28® units can be purchased with Gullco's exclusive adjustable height, self-aligning, spring-loaded caster wheel assembly for self-propelled bevelling along any length of plate which helps to maintaining a uniform bevel and consistent root face. Sold separate

Angle bevel pins enable bevel angle adjustments
The KBM-28® units are supplied with angle bevel pins for 22 1/2°, 30°, 37 1/2°, 45° and 55° bevels. Pins for other bevel angles are available upon request.

KBM-28®


...for bevelling the top-side
of plate

KBM-28U®

...for bevelling the under-side
of plate

Operates at 6.5 feet (2 meters) per minute

WITH ADJUSTABLE BEVELLING HEAD TO PRODUCE BEVEL ANGLES 22 1/2° THROUGH 55°

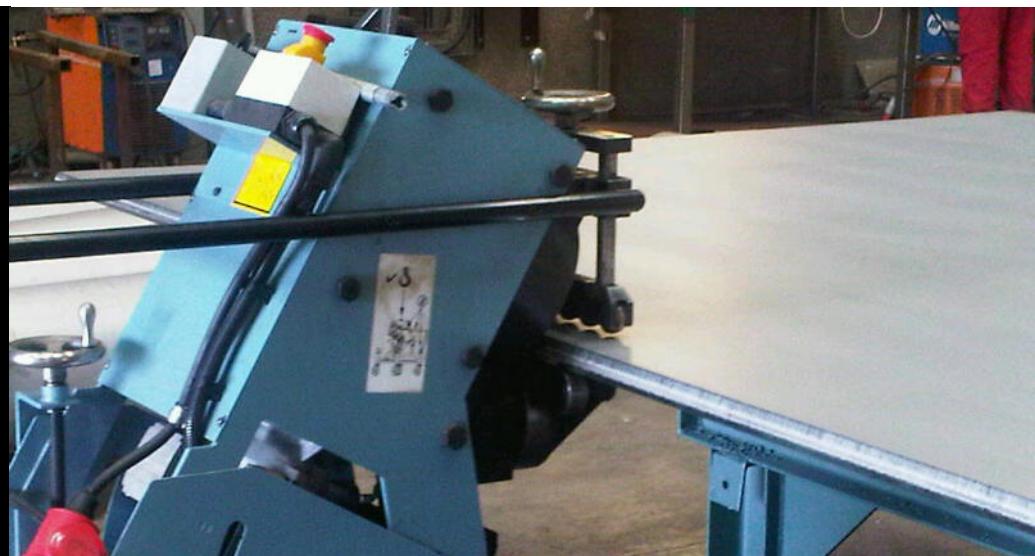



KBM-28-080

HYDRAULIC ADJUSTABLE UNDERCARRIAGE

For easy height adjustment KBM-28® units can be supplied with two types of undercarriages. Both are supplied with Gulco exclusive self-aligning caster wheel assemblies for self-propelled beveling along the length of the plate, maintaining a uniform bevel and consistent root face. Undercarriage sold separate



KBM-28-002

CASTER WHEEL ADJUSTABLE UNDERCARRIAGE

Adjustable undercarriage supplied with Gulco's adjustable height self-aligning spring-loaded caster wheel assemblies for self-propelled operation. Best suited for applications where constant machine height is required.

Maximum Bevel Width:	1.10" (28.00 mm) at standard 30° bevel angle on material with a tensile strength of 64,000 lb/in ² (45 Kg/mm ²)
Maximum Bevel Depth:	0.95" (24.2 mm) at standard 30° bevel angle on material with a tensile strength of 64,000 lb/in ² (45 Kg/mm ²)
Min. Plate Thickness:	5/16" (8.0 mm)
Max. Plate Thickness:	2" (50.0 mm)
Bevel Speed:	78.7" (200 cm) per minute*
Motor:	3 HP, 3 phase, available for 230, 460 and 575V~ at 60Hz and also 380 and 400/415V~ at 50Hz supply
Weight:	890 lbs. (404Kg.) including undercarriage assembly
Complies With:	C.S.A./N.R.T.L. (File # LR 35006-6) and C.E. Regulations

* Top speed can vary depending on bevel depth, voltage and frequency fluctuation

KBM-28® comes complete with the following standard equipment:

- 1- KBM-28-X1C Cutter (medium cut)
- 1- Set Bevel Angle Pins for 22 1/2°, 30°, 37 1/2°, 45° and 55 °
- 1- Tool Kit

KBM-28U® UNDERSIDE BEVELLER


The KBM-28U® is perfect for beveling the underside of the plate without need for flipping the work piece over. In combination with the KBM-28® efficiency is greatly increased when beveling both the top and bottom of the plate.



Accessories available:

- KBM-28-X1C: Medium Tooth Cutter (smooth finish)
- KBM-28-X1H: HighTensile Cutter
- GBM-28 (Specify Degree Required): Angle Bevel Pins for angles other than those supplied as standard)
- GBM-28-0.5: Cutter Shims
- GBM-28-1.0: Cutter Shims
- KBM-28-080: Hydraulic Undercarriage
- KBM-28-002: Adjustable Undercarriage

MAXIMUM RECOMMENDED BEVELLING CAPACITIES

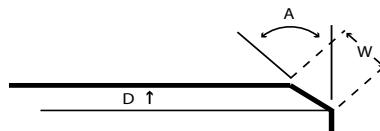

BEVEL ANGLE	TENSILE STRENGTH					
	64,000 lbs/in ² (45 kg/mm ²)		71,000 lbs/in ² (50 kg/mm ²)		85,000 lbs/in ² (60 kg/mm ²)	
A	W	D	W	D	W	D
22 1/2°	1.10" (28 mm)	1.02" (26 mm)	1.02" (26 mm)	0.95" (24 mm)	0.91" (23 mm)	0.84" (21.2 mm)
30°	1.10" (28 mm)	0.98" (25 mm)	0.98" (25 mm)	0.85 (21.7 mm)	0.89" (22.5 mm)	0.77" (19.5 mm)
37 1/2°	1.06" (27 mm)	0.84" (24.2 mm)	0.98" (25 mm)	0.78" (19.8 mm)	0.83" (21 mm)	0.66" (17.7 mm)
45°	1.02" (26 mm)	0.72" (18.4 mm)	0.94" (24 mm)	0.67" (17 mm)	0.83" (21 mm)	0.58" (14.8 mm)
55°	0.98" (25 mm)	0.56" (14.3 mm)	0.91" (23 mm)	0.52" (13.2 mm)	0.83" (21 mm)	0.47" (12 mm)



KAT, KBM, MOGGY, KATBAK & SAM are registered trademarks of Gulco Enterprises Limited

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

Distributed by:



GULLCO INTERNATIONAL LIMITED - CANADA

Phone: 905-953-4140 Fax: 905-953-4138 e-mail: sales@gulco.com

GULLCO INTERNATIONAL INC. - U.S.A

Phone: 440-439-8333 Fax: 440-439-3634 e-mail: ussales@gulco.com

GULLCO INTERNATIONAL (U.K.) LIMITED - EUROPE

Phone: +44 1257-253579 Fax: +44 1257-254629 e-mail: sales@gulco.co.uk

GULLCO INTERNATIONAL PTY LIMITED - AUSTRALIA

Phone: 61 (0)7 3348 5515 Fax: 61 (0)7 3348 5510 e-mail: ausales@gulco.com

GULLCO INTERNATIONAL INDIA PVT LIMITED - INDIA

Phone: 91-20-65260382 Fax: 91-20-26836656 e-mail: india.lo@gulco.com

GULLCO INTERNATIONAL SHANGHAI LIMITED - CHINA

Phone: +8621-50460341 Fax: +8621-50463554 e-mail: gsuntech@sh163.net

GULLCO INTERNATIONAL LIMITED - LATIN AMERICA

Phone: 55-11-9485-1336 e-mail: rogerio.macedo@gulco.com

STUCH GMBH & CO. KG SCHWEISSTECHNIK - GERMANY

Phone: (02 03) 72 94 95 Fax: (02 03) 72 94 96 e-mail: info@stuch-schweisstechnik.de